



## TOOL AND POWER INNOVATION COMPANY

MAKING INEFFICIENCIES EXTINCT











### We are the Tool and Power Innovation Company

Since 2004 Makinex has been designing tools and equipment that is innovative and award-winning. It is this cutting-edge dedication to providing products that are faster, safer and easier to use that sets us apart.

All our products are carefully researched and pre-tested to meet the needs of the toughest industries in the world – construction, rental, flooring, concrete, landscaping and related industries.

We pride ourselves on designing, manufacturing and distributing unique products that enhance productivity, save time and decrease physical effort.

### **Table of Contents**

| Our Innovation Range               | 1     |
|------------------------------------|-------|
| Dual Pressure Cleaner              | 2     |
| Dual Pressure Washers              | 3     |
| Hose2Go                            | 4     |
| Concrete Grinder                   | 5     |
| Mixing Stations                    | 6-7   |
| Jackhammer Trolley                 | 8     |
| Tile Smasher Heads and Accessories | 9     |
| Powered Hand Truck                 | 10    |
| Mobile Charge Pod                  | 11    |
| Portable Power Boxes               | 12-13 |
| Generators                         | 14-15 |
| Connect with Makinex               | 16    |
| Our Awards                         | 17    |



## **OUR INNOVATION RANGE**

### **Surface Cleaning**





**Surface Preparation** 









**Lifting and Loading** 



**Power Solutions** 











## **DUAL PRESSURE CLEANER** 2200 (DPC)











**Telescopic Handle** 



Lightweight



### 2 in 1 Pressure Cleaner - Cleans 3x Faster

Redefining cleaning power. Combining a pressure wand and rotary surface cleaner, the DPC delivers 2200 psi control all in one machine. It blitzes through dirt and grime at 3x the speed, outshining its rivals. With a mere 88lbs weight, it's compact, lightweight, and versatile - a dynamic companion for driveways, walls, and ceilings. This 2in1 marvel seamlessly toggles between rotor and wand through a single handle turn. Whirl a way, pump, and engine merge into a compact powerhouse. Conquer tough spots with the telescopic adjustable handle.

### **Ideal For**

- · Vertical and horizontal cleaning
- · Cleaning outdoor areas including tennis courts
- · Cleaning driveways, paths and exterior surfaces
- · Cleaning outdoor furniture
- · Cleaning vehicles, motorbikes and trailers



| Specifications 2200        |                                   |
|----------------------------|-----------------------------------|
| Dimensions (handle folded) | L 2ft 8inX W 1ft 6in/ X H 3ft 4in |
| Weight                     | 88lbs                             |
| Hose length                | 32ft, 9in                         |
| Sound level at handle      | 80 dBA full load @ 3,600 rpm      |
| Gas engine                 | Briggs & Stratton                 |
| Fuel tank capacity         | 8.8G                              |
| Fuel                       | Unleaded 86 octane or higher      |
| Pump                       | AR Triplex pump                   |
| Pressure range             | 1000 to 2200 psi                  |
| Rotary size                | 18in                              |

## DUAL PRESSURE WASHER 2500 AND 4000 (DPW)

## 2 in 1 Commercial Pressure Cleaner – Cleans 3x Faster

Your Ultimate All-in-One Pressure Washing Solution. This remarkable machine combines a pressure wand and rotary cleaner, offering adjustable pressure control from 1000 to 4000 psi. Tackle a heavy-duty job with ease. It boasts an impressive 3x speed in coverage compared to rivals, ensuring efficiency like never before. Safety is paramount, with advanced features like a front wheel lock to prevent rolling. Switch effortlessly between rotor and wand through a simple handle turn. Packing up is a breeze with the foldable handle, while the 24" precision-made surface cleaner, hose reel, and large wheels add practicality.



- · Heavy duty cleaning
- · Versatile cleaning
- · Vertical and horizontal cleaning
- Cleaning outdoor areas including tennis courts, parking lots, residential and commercial
- Cleaning driveways, paths and exterior surfaces
- Cleaning greasy workshop and floors
- · Cleaning trucks and machinery







Adjustable Pressure from 1000 to 4000 PSI



Direct Drive Pump



13 HP Honda Engine (DPW4000)






| Specifications 2500        |   |
|----------------------------|---|
| Weight                     | 145lbs  |
| Pressure range             | 1000-2500 psi   |
| Hose length                | 50ft wand length  |
| Sound level at handle      | 92dBA   |
| Pump                       | AR Triplex with gear reduction, internal bypass unloader, thermal release valve |
| Fuel tank capacity         | 0.8G  |
| Gallons per minute         | 2.5 GPM   |
| Rotary size                | 21in  |
| Engine                     | Pull start Honda GX200 air-cooled<br>4-stroke OHV or Vanguard 25V3              |
| Dimensions (handle folded) | L 3ft 8.8inX W 1ft 9.7in/ X H 2ft 5in   |
| Fuel                       | Unleaded 86 octane or higher  |
|                            |   |

| Specifications 4000         |  |
|-----------------------------|--|
| Weight                      | 222lbs   |
| Pressure range              | 1000-4000 psi  |
| Hose length                 | 50ft   |
| Sound level at handle       | 92dBA  |
| Pump                        | Heavy duty AR Triplex with gear reduction, thermal release valve, eternal bypass |
| Fuel tank capacity          | 1.6G   |
| Gallons per minute          | 4.0 GPM  |
| Rotary size                 | 24in   |
| Engine                      | Honda GX390  |
| Overall width               | 24.4in   |
| Height (with handle folded) | 34.4in   |
| Length (with handle folded) | 53.5in   |

## **HOSE2GO**

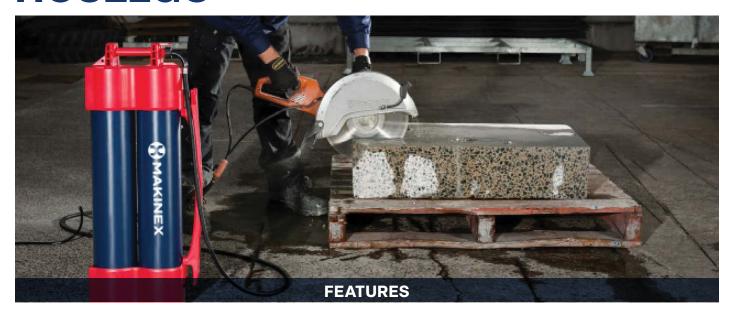







**Portable** Dust Suppression **Pressurized Water Supply** 



**Blade Cooling** 

### **Constant Pressure Water Supply Unit** Without a Battery or Pump

The ultimate portable pressurized water solution. Forget manual pumping and complicated electrics. This pumpless system delivers 3.6G of portable pressurized water (7-10 psi) for dust suppression, blade cooling, and more, for up to 30 minutes. No batteries, no electricity, no worries. Lightweight and ergonomic, offering two carry positions. It's not just a tool - it's a versatile solution for multiple convenience and compliance.

| Specifications             |                            |
|----------------------------|----------------------------|
| Dimensions                 | L12.8in x W5.7in x H31.5in |
| Weight (dry)               | 12.6lbs                    |
| Weight (full)              | 43lbs                      |
| Full tank capacity         | 3.65gal                    |
| Continuous output pressure | 7-10 psi                   |

### **Inclusions**

- 1. Spray gun
- 2. Hose 3m
- 3. Tap adaptor
- 4. Screw on quick connect hose fitting
- 5. Quick connect stop valve hose fitting
- 6. Strap attachment







# **CONCRETE GRINDER**

## A Robust Tool for Grinding, Polishing, and Finishing Concrete Surfaces

The Makinex Concrete Grinder is your go-to for grinding, polishing, and finishing concrete surfaces, offering exceptional adaptability. This grinder excels in leveling floors and with its removable magnetic shroud insures flawless edge grinding. CE certified and equipped with power-off and overloading protections, it's a reliable choice. The outlet port accommodates vacuum attachment, maintaining a clean environment. Compatible with standard 7.1 in diamond or resin grinding discs, this tool effortlessly removes surface coatings like epoxy and paint from concrete floors.

| Specifications Concrete Grinder |                            |
|---------------------------------|----------------------------|
| Dimensions                      | L 17.7inX W 13in X H 9.3in |
| Net weight                      | 15.4lbs                    |
| Application                     | Concrete                   |
| Motor specifications            | 230V/50-60HZ/2050W         |
| Speed                           | 0-3000r/min                |

### **Ideal For**

- Polishing
- Concrete grinding
- · Finishing concrete surfaces
- · Leveling floors
- · Precise edge grinding







### **FEATURES**



Removable Dust Cover for Edge Grinding



Power Off and Overload Protection



Vacuum Outlet Port



Variable Speed and Trigger Lock



Compatible with 7.1 inch Diamond and Resin Grinding Discs



Ergonomically 2-Handed Controls Constant Pressure

## **MS-100 MIXING STATION**

### Portable, Fast and Easy **Flooring Materials Mixing Station**

Elevate your flooring process with the Makinex Mixing Station MS100. Mix up to 4 bags in 3 minutes for precise pouring and less waste. Save time, labor, and costs while ensuring an ergonomic and lightweight experience. Say goodbye to spills with the removable lid and enjoy easy clean-up.

- · Perfect mix and pouring every time
- Mix up to 4 bags in 3 minutes
- · Save time and money

| Specifications                     | Mixing Station |
|------------------------------------|----------------|
| Height handle attached (operating) | 42-51in        |
| Height handle detached (transport) | 31in           |
| Overall width                      | 21in           |
| Overall length                     | 25in           |
| Length of handle adjustment        | 10in           |
| Weight (without stirrer/mixer)     | 40lbs          |

| Specifications       | Mixer                            |
|----------------------|----------------------------------|
| Weight (w/o paddle)  | 11lbs                            |
| Voltage              | 120v                             |
| Watts                | 1800w                            |
| Amps                 | 18 (full load)                   |
| Speeds               | 2                                |
| DDM David (contable) | 1st gear 150-300 rpm             |
| RPM Range (variable) | 2 <sup>nd</sup> gear 300-650 rpm |

### **Ideal For**

- · Flowable materials
- · Mixing epoxies and self-leveling cements
- Plasterers
- · Concreters
- · Floor preparation









Station and mixer sold seperately



### **FEATURES**



Removable Dust Splash and Bucket



**Easy Tilt Operation for Precision Pouring** 

## **MS-150 MIXING STATION**

### **Portable, Fast and Easy Flooring Materials Mixing Station**

Large, portable, fast and easy flooring materials mixing station redefining flooring mixing, the MS150 Mixing Station is a portable powerhouse, blending up to 5 bags in 7 minutes while ensuring precise pouring and reduced waste. Save time and labor while relishing an ergonomic lightweight design that curbs operator fatigue and injury. With a removable vacuum attachment for spills and dust suppression, achieve meticulous mixing and pouring within the single unit.

- · Perfect mix and pouring every time
- Mix 5 bags in 7 minutes
- · Save time and money

| Specifications   | Mixing Station  |
|--|-----------------|
| Height handle attached (operating)                       | 42.7in - 52.2in |
| Height handle detached (transport)                       | 40.7in          |
| Overall width  | 24.1in          |
| Overall length   | 29.1in          |
| Length of handle adjustment                              | 9.56in          |
| Weight (without makinex electric mixer and helix paddle) | 48.5lbs         |
| Weight (with makinex electric mixer and helix paddle)    | 72.75lbs        |

| Specifications        | Mixer                            |
|-----------------------|----------------------------------|
| Weight                | 14.3lbs                          |
| Voltage               | 120v                             |
| Watts                 | 2200w                            |
| Speeds                | 2                                |
| DDM Davage (versions) | 1st gear 150-300 rpm             |
| RPM Range (variable)  | 2 <sup>nd</sup> gear 300-650 rpm |

### **Ideal For**

- · Flowable materials
- · Mixing epoxies and self-leveling cements
- Plasterers
- Concreters
- · Floor preparation





Lightweight



**Mixes** 



Station and mixer sold seperately



### **FEATURES**



**Hose Connector** 



**Easy Tilt Operation for Precision Pouring** 

### **JACKHAMMER TROLLEY**

### **A Versatile Demolition Tool that Removes** Floor Tiles, Hardwood, and Mortar Beds

Demolish with unmatched speed. Rip through ceramic tiles, thinset, and more up to 6 times faster. The innovative design reduces impact and fatigue, with 80-degree angles across 5 settings. Streamlined and robust, the trolley boasts an easy-touse spring and brake lever for angle adjustments and an inbuilt dampening system that minimizes impact, vibration, injury risk, and muscle fatigue.

#### **Specifications** Weight 60.6lbs (trolley without jackhammer) L 3ft 3in x W 1ft 3 in x H 12 in Dimensions (trolley without jackhammer) Suitable for 35lbs Bosch 11335K, Hilti TE1000, Hilti TE1500, Makita 1307, 1317,

### **Accessories**

jackhammer models



Tile Smasher Blade, TSH-B



1520, 1512 and Bauer 1632E-B

Universal Block Set JHTB-U-2



Handle Grips MAK-UP-10-V2



Brake Lever and Cable JHT-99-63-V2



Tile Smasher Attachment Bolts TSH-BS-V2-KIT



Vacuum Attachment JHT-VA-01-00







**6 Different** Positions, Ranging from 20-80 Degrees







## TILE SMASHER HEADS AND ACCESSORIES

## Precise Demolition Tools for the Fast and Efficient Removal of Tiles, Mortar Beds, and More


The Makinex Tile Smasher Head and accessories are expertly engineered for the fast and efficient removal of tiles, mortar beds, and more. Designed for use with breakers up to 42 lbs it pairs seamlessly with the Makinex Jackhammer Trolley, offering enhanced productivity while minimizing user fatigue.

For lighter handheld breakers up to 22 lbs, the SDS Plus and SDS Max options deliver exceptional versatility and precision. All versions feature a high-tensile steel head, replaceable blades, and a secure tapered locking mechanism.

Additionally, the Flippable Wide Chisel accessory is designed for maximum durability, making it the perfect companion for demanding demolition tasks on both concrete and wooden surfaces.

### **Ideal For**

- Construction
- · Renovators
- Rental
- · Demolition

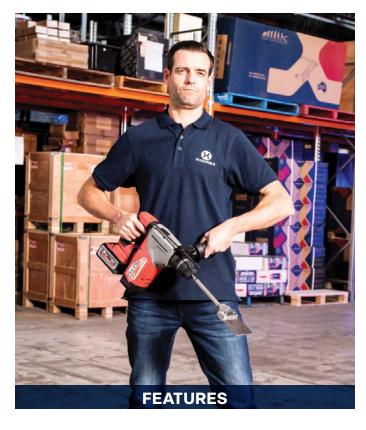





### **Demolition Products**



Tile Smasher Head, with 1.125in HEX Shank Combo V2 TSHC-SS-US-V2



Flippable Wide Chisel WCUS-420



SDS Max TSH-SDS-MAX



SDS Plus TSH-SDS-PLUS



Tile Smasher Head, with Hilti HEX Shank Combo V2 TSHC-HS-US-V2



Tile Smasher Blade TSH-B



Tile Smasher Attachment Bolts, TSH-BS-V2-KIT



SDS Blade and Bolt Kit TSH-SDS-B-KIT

## **POWERED HAND** TRUCK (PHT)

### **The Ultimate Materials Handling Lift & Load Solution**

Raise your lifting game. With a solo 309lbs lift capacity, it's your partner in workshops, warehouses, and beyond. Battery-powered for up to 50 cycles per charge, it eliminates fatigue and risky twoperson lifts. Goodbye costly forklifts and licenses. Foldable and portable, it's your go-anywhere lifting solution. Charge up, lift more, and transform how you work safely.

- Solo lift up to 309lbs
- Battery powered with up to 50 lifts per cycle
- · Reduce back injuries and operator fatigue


#### **Ideal For**

- Workshops
- Warehouses
- · Factories and depots
- Rental
- · Distribution companies

| Specifications                              |   |
|---|---|
| Machine weight                              | Total 88lbs handle end –<br>33lbs wheel end – 55lbs |
| Weight of fork attachment only              | 26.5lbs   |
| Maximum lift capacity                       | Up to 309lbs  |
| Lift range / height (of hook attachment)    | Ground level up to 6ft 2in                          |
| Lift range / height<br>(of fork attachment) | Ground level up to 6ft2in                           |
| Folded dimensions                           | L: 6ft 6in x W: 2ft 4in x H: 10.4in                 |
| Linear actuator power                       | 12V DC, 25 amp                                      |
| Lift cycles per charge                      | Approx. 50 lift cycles                              |
|   |   |





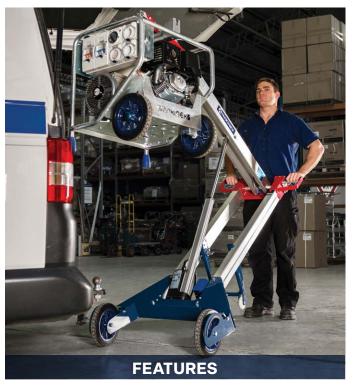



Up to 309lbs

[4] **Battery Powered** with Up to 50 Lifts Per Cycle



### **Accessories**



Fork PHT2-FA-00



Big Wheels PHT2-09R. PHT2-09L



Nose Extension PHT2-08



Glass Sucker PHT2-GS-00



PHT2-SA-00

## **MOBILE CHARGE POD (MCP)**









Lightweight



Large Inspection Holes



IP33 Rated



Single 15A Supply



**Air Ventilation** 

## Safe, Fire Retardant On-Site Battery Storage and Charging

Redefining on-site battery storage and charging. The Mobile Charge Pod offers a safe haven for your power products, providing a simple and organized solution for contractors and tradespeople. With 6 easy-to-use lockers accommodating various tool and battery types, it's a fire-resistant design crafted by and for Tier 1 Contractors that will relieve stress from equipment loss and battery downtime. Lightweight yet robust, it surpasses metal lockers, with forklift pockets for transportation convenience.

### **Ideal For**

- Construction
- Rental
- Jobsites
- · Service/repair shops
- · Automotive shops
- Safe and compliant storage (AS/NZS 3190 and AS/NZS 3012 as a portable socket outlet assembly (PSOA))


### **Benefits**

- · Fire retardant
- · Easy-to-use GFCI protected lockers
- · Protected GPO for each locker

| Specifications                             |   |
|--|---|
| Size                                       | 58.3in x 17in x 54in  |
| Weight                                     | 163.1lbs  |
| Dimensions at the front of locker          | 22.8in x 13in x 14.6in  |
| Socket outlets                             | 1 15A GFCI per locker   |
| Material                                   | Super tough, UV stabilised & V2 fire rated polyethylene                 |
| IP Rating                                  | IP33  |
| Compliance suitable for construction sites | AS/NZS 3190 and AS/NZS 3012 as a portable socket outlet assembly (PSOA) |



## PORTABLE POWER BOX (PPB) SERIES

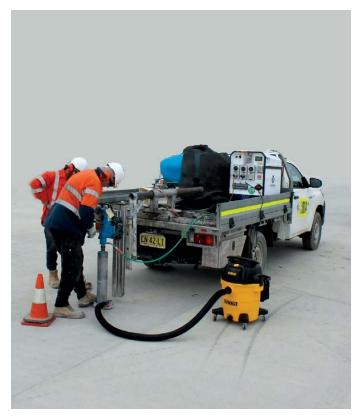





PPB 5-5 Australian model shown for demonstration purposes

### **FEATURES**





Single



### Portable Power Box (PBS) Solution

The Makinex Portable Power Box (PPB) series is a versatile range of high-capacity, portable power storage devices designed for various industries and applications. Emissions-free and whisperquiet, these units provide reliable power for both indoor and outdoor use without the need for fuel.

Each PPB model is equipped with advanced safety features, such as RCD protection, touch-safe solar PV connectors, thermal overload protection, and a battery management display. With plug-and-play power plugs, USB-A and USB-C (quick charge 5V-3A) outlets, and easy transportability, the PPB series delivers safe, clean power wherever and whenever needed.

Whether for concrete cutting, mobile catering, event management, film production, emergency backup, or confined space applications, the Makinex PPB series offers tailored solutions to meet diverse power needs.



Charge



### **Ideal For**

- · Indoor environment
- · Outdoor environments
- Events
- Construction
- Mining
- · Film studios





PPB 6-15 Bates PPB 6-15

| Specs         | PPB 5-5  | PPB 6-15  | PPB 6-15 Bates  |
|---------------|--|---|---|
| Power Output  | 5kW  | 6kW   | 6.5kW   |
| Battery size  | 5kWh   | 15kWh   | 15kWh   |
| Outlets       | 2 x Dual 20A 120V GFCI, 1 x L5-30R<br>30A 120V | 30A-120V/240VAC & 20A 120VAC,<br>USB-A/USB-C 5V-3.0A                    | 2 x Dual 20A 120V GFCl, 1 x L5-30R<br>30A 120V, 1 x stage pin 60A 120V<br>(50A Max), USB-A / USB-C, 5V 3.0A |
| Inlet         | 1 x 120V 15A and 4kW solar                     | 15A – 120VAC (trickle charge), 20A – 240VAC (fast charge) and 4kW solar | 1 x 5-15P 15A 120V, 1 x stage pin 60A<br>120V (50A Max), 8kW solar  |
| Charging time | 80% - 2.5 hr, 100% - 3 hrs                     | 100% 120V - 9hrs, 100% 240V -<br>3hrs hours                             | 100% Stage Pin 60A - 2.5hrs,<br>100% 15A inlet – 9hrs   |
| Peak surge    | 10 kW 5 seconds                                | 12 kW 5 seconds   | 13kW 5 seconds  |
| Dimensions    | 18.1 L x 26 W x 27.2 H in                      | 38.4 L x 20.3 W x 36.7 H in   | 38.4 L x 20.3 W x 36.7 H in   |
| Weight        | 98lbs  | 452lbs  | 474lbs  |

## **GENERATORS**









Single **Phase Sockets** 



**Phase Sockets** 





Most compact generators on the market

15% more power from the same engines

3 phase and single-phase capacity

Easy to position near work area

### 32kW 480V Dual Phase **World's Smallest**

- · Compact, no tow-behind
- · Radial flux alternator
- 13.2G fuel tank
- · RCD and RCBO protection



### **Receptacle Connections**

| Outlets<br>Provided     | 16kW<br>240V | 16kW<br>480V      | 23kW<br>240V | 23kW<br>480V     | 32kW<br>480V   |
|-------------------------|--------------|-------------------|--------------|------------------|----------------|
| 50A<br>Three-<br>Phase  | © 58369      |                   | © 58369      | © % CS8369       | CS8369         |
| 50A<br>Single-<br>Phase | © S6369      |                   | © S6369      |                  |                |
| 30A<br>Three-<br>Phase  |              | (L) 1)<br>L22-30R |              | (Log)<br>L22-30R | ( ) L16-30R    |
| 30A<br>Single-<br>Phase | L14-30R      | L16-30R           | L14-30R      | L16-30R          |                |
| 20A<br>Single-<br>Phase | 20A GFCI     | 20A GFCI          | 20A GFCI     | 20A GFCI         | 2x 20A<br>GFCI |

| Specifications        |   |
|-----------------------|---|
| Voltage               | 120/240V single phase; 480V three phase |
| Frequency             | 60HZ                                    |
| Rated output          | 32kW                                    |
| Rated power factor    | 0.8                                     |
| Max Amps single phase | 30A@240V                                |
| Max Amps three phase  | 50A@480V30                              |
| Dry weight            | 772lbs                                  |
| Noise level (7m)      | 72-76dB                                 |
| Engine type           | Twin cylinder air cooled petrol         |
| Engine model          | Honda GX690 X 2                         |
| Starting system       | Electric / Key Start                    |
| Displacement          | 1376CC                                  |
| Fuel economy          | NO LOAD 72d                             |
| Fuel tank             | 13.2g                                   |
| Dimensions            | 43.5in (L) x 24.8in (W) x 40.3in        |

### 16kW 240V Dual Phase **Highly Portable**

- · Compact, no tow-behind
- Radial flux alternator
- 9.0G fuel tank
- · RCD and RCBO protection



| Specifications        |   |
|-----------------------|---|
| Voltage               | 120/240V single phase; 240V three phase |
| Frequency             | 60HZ                                    |
| Rated Output          | 16kW                                    |
| Max Amps single phase | 22A @ 120V                              |
| Max Amps three phase  | 37A @ 240V                              |
| Dry weight            | 342lbs                                  |
| Noise level (7m)      | NO LOAD - 72dB                          |
| Engine type           | Twin cylinder air cooled petrol         |
| Engine model          | Honda GX690                             |
| Starting system       | Key Start                               |
| Displacement          | 688CC                                   |
| Fuel economy          | 0.92gal @ 50% LOAD                      |
| Fuel tank             | 9.0G                                    |
| Dimensions            | 30.4in (L) x 20.8in (W) x 35.5in (H)    |
|                       |   |

### 16kW 480V Dual Phase **Highly Portable**

- · Compact, no tow-behind
- Radial flux alternator
- 9.0G fuel tank
- RCD and RCBO protection



| Specifications        |   |
|-----------------------|---|
| Voltage               | 120/480V single phase; 480V three phase |
| Frequency             | 60HZ                                    |
| Rated Output          | 16kW                                    |
| Max Amps single phase | 31A @ 120V                              |
| Max Amps three phase  | 18A @ 480V                              |
| Dry weight            | 342lbs                                  |
| Noise level (7m)      | NO LOAD - 72dB                          |
| Engine type           | Twin cylinder air cooled petrol         |
| Engine model          | Honda GX690                             |
| Starting system       | Key Start                               |
| Displacement          | 688CC                                   |
| Fuel economy          | 0.92gal @ 50% LOAD                      |
| Fuel tank             | 9.0G                                    |
| Dimensions            | 30.4in (L) x 20.8in (W) x 35.5in (H)    |
|                       |   |

### 23kW 240V Dual Phase **Compact & Powerful**

- · Compact, no tow-behind
- · Radial flux alternator
- 13.2G fuel tank
- RCD and RCBO protection



|  | Specifications        |                                     |
|--|-----------------------|-------------------------------------|
|  | Voltage               | 120V single phase; 240v three phase |
|  | Frequency             | 60HZ                                |
|  | Rated Output          | 23kW                                |
|  | Max Amps single phase | 18A @120V                           |
|  | Max Amps three phase  | 50A @ 240V                          |
|  | Dry weight            | 573lbs                              |
|  | Noise level (7m)      | NO LOAD – 72d                       |
|  | Engine type           | Twin cylinder air cooled petrol     |
|  | Engine model          | VanGuard 61G277                     |
|  | Starting system       | Electric / Key Start                |
|  | Displacement          | 993CC                               |
|  | Fuel economy          | 1.5gal @ 50% LOAD                   |
|  | Fuel tank             | 13.2G                               |
|  | Dimensions            | 43 in (L) x 25 in (W) x 40 in (H)   |
|  |                       |                                     |


### 23kW 480V Dual Phase **Compact & Powerful**

- · Compact, no tow-behind
- Radial flux alternator
- 13.2G fuel tank
- RCD and RCBO protection



| 120V single phase; 480v three phase  |
|--------------------------------------|
| 60HZ                                 |
| 23kW                                 |
| 11A @ 240V, (18A @ 110V Aux Winding) |
| 28A @ 480V                           |
| 573lbs                               |
| NO LOAD - 72d                        |
| Twin cylinder air cooled petrol      |
| VanGuard 61G277                      |
| Electric / Key Start                 |
| 993CC                                |
| 1.5gal @ 50% LOAD                    |
| 13.2G                                |
| 43 in (L) x 25 in (W) x 40 in (H)    |
|                                      |

## **CONNECT WITH MAKINEX**

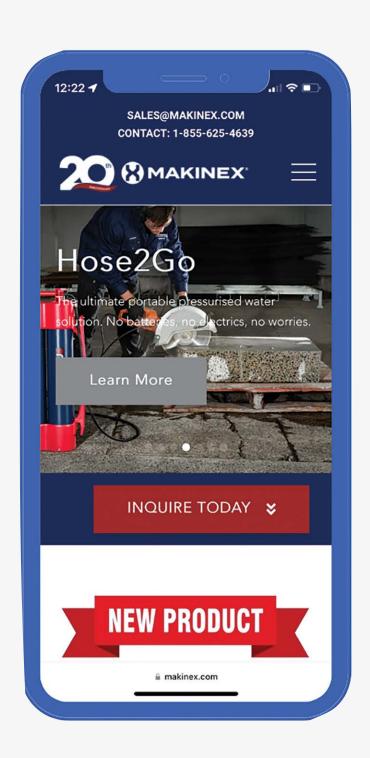




@f J in

Connect with Makinex on social media

### **OUR AWARDS**

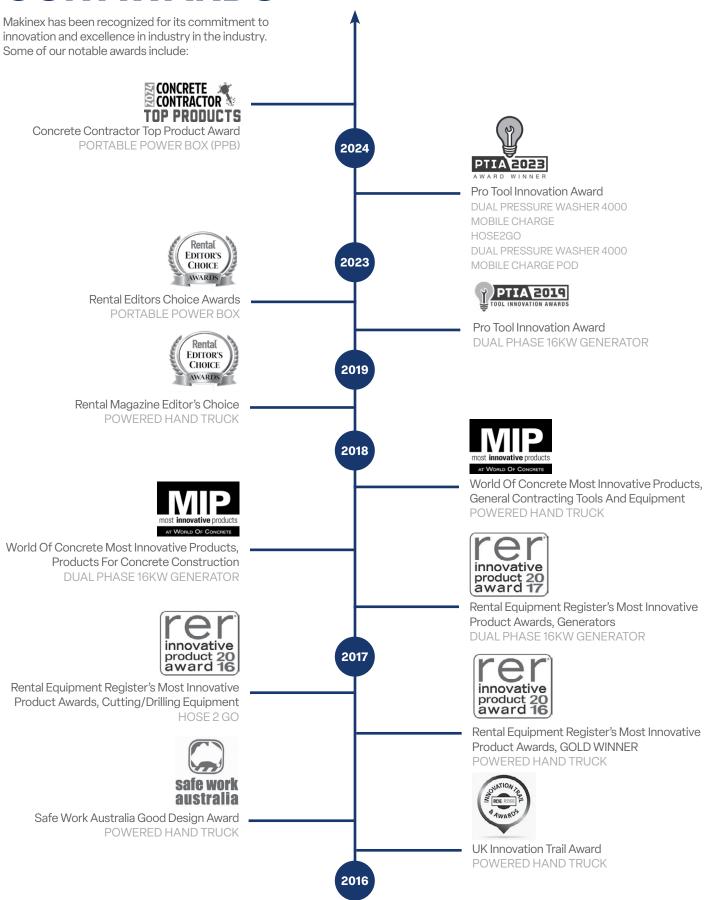



### **Our Mission**

In every product we design, Makinex is on a mission to make inefficiencies extinct. In fact, this driving force is embedded in our name.

We strive for continuous improvement. Always looking for innovative, practical ways to make hard jobs easier for contractors and tradespeople. So they save time, reduce physical effort and make more money.



Scan this QR code to find out more



2151 Heritage Pkwy #400 Mansfield, TX 76063 Phone: 1-855-625-4639 Email: sales@makinex.com www.makinex.com

Connect with us on







